


3-STEP LEAD BASED BATTERY CHARGERS


LM 12027-3T 12V 2,7A



- 3-Phase charge control
- Small in weight and size
- Switch mode
- Desktop unit
- 3 separate LED indicators

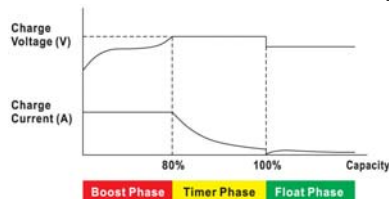

Main Input	230V 50Hz max. 55VA
Nominal battery voltage	12V
Constant charge current	2,7A max.
Timer Phase (Yellow)	14,7V for 2 hours
Float Phase (Green)	13,8V
No load output voltage	14,7V
Efficiency	83% typical
Protection	Short circuit proof Against overheating Against reverse polarity
Operating ambient temperature	0 to +40°C
Storage ambient temperature	-20 to +75°C
EMC & EMI	EN 55014-1-2 EN 61000-6-3
LED Indication	Red & Yellow & Green
Output terminals	Battery clips and push-on terminals
Case material	Plastic case
Weight	280 g
Dimensions (LxWxH)	105 x 65 x 42mm

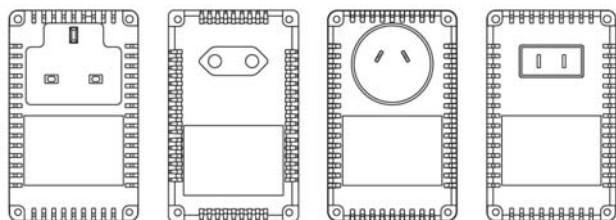

WWW.INTERCEL.NL