

Basic Specifications

Voltage:	12 Volt
Capacity:	20 hour rate: 107Ah 10 hour rate: 100Ah 5 hour rate: 87.5Ah
Design life:	10 years
Appr. dimensions:	330x171x215/220mm (LxWxH)
Terminal:	M8
Container & lid:	Flame retardant ABS
Internal Resistance:	5mΩ (Fully charged)
Approximate weight:	32kg
Max charge current:	30A
Max discharge current:	900A (5 sec.)
Operating temp. range:	-20°C ~ +50°C
Self discharge:	lower than 3% per month

Typical Applications

- UPS / Emergency Power
- Evacuation system
- Security systems
- Traffic systems
- Data center
- Telecommunication
- Hospitals

Discharge data in Watts (25°C)

	(V/cell)	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr
End Voltage	1.80V	329	279	171	104	48,5	34	19,1
	1.75V	353	294	177	111	49,1	34,4	19,6
	1.70V	360	299	183	114	50,9	35	20
	1.65V	379	315	188	118	51,2	35,4	20,1
	1.60V	392	321	199	124	52,8	35,8	20,3

Discharge data in Amperes (25°C)

	(V/cell)	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr
End Voltage	1.80V	175	143	91	57,4	25,3	17,2	10
	1.75V	187	153	93	60,5	26,9	17,5	10,3
	1.70V	200	164	96	61,5	27,2	18	10,5
	1.65V	221	178	104	62,5	27,7	18,3	10,6
	1.60V	229	185	108	66,2	27,9	19	10,8

Long Life series


These VRLA batteries use thicker plates than the standard 4-5 year models. The electrolyte is absorbed by the AGM separators and plates and therefore these batteries can be mounted in any position. The one-way valve allow gases to escape, avoiding excessive pressure build-up in the case of accidentally overcharge.

The pbq Long Life series: a range of standard shaped Long Life batteries with a functional life of 10-years for standby applications in accordance to the EUROBAT "High Performance" specifications.


General Features of the pbq Long Life series

- Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99% and freedom.
- from electrolyte maintenance or water adding.
- Not restricted for air transport-complies with IATA/ICAO Special Provision A67
- Can be mounted in any position
- Computer designed lead, calcium tin alloy grid for high power density
- Long service life, float or cyclic applications. Maintenance free operation
- Low self discharge
- Flame retardant ABS, UL94V-0 / 92-2
- International Standard, JIS and DIN
- High Reliability and Good Quality
- Deep Discharge Recovery
- High Power Density


Effect of Temperature on Long term Float Life

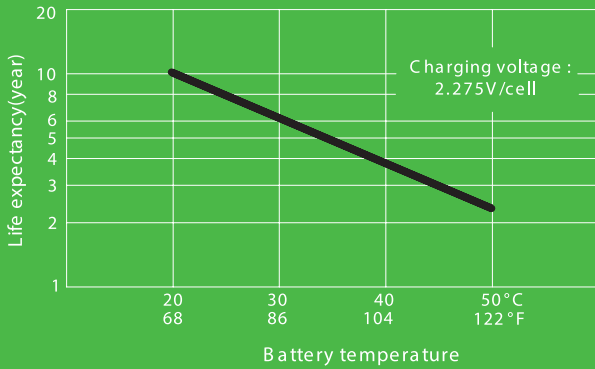


Discharge Time VS. Discharge Current (25°C)

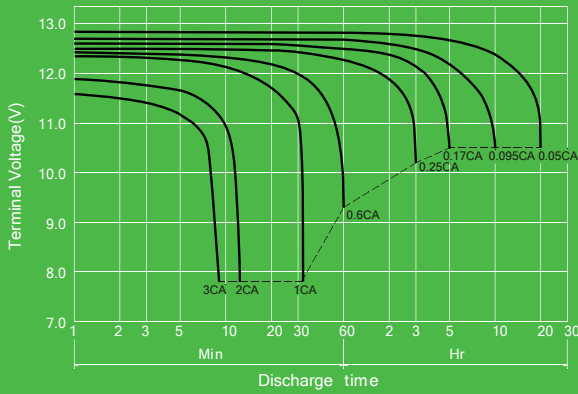

Battery Charging Characteristics

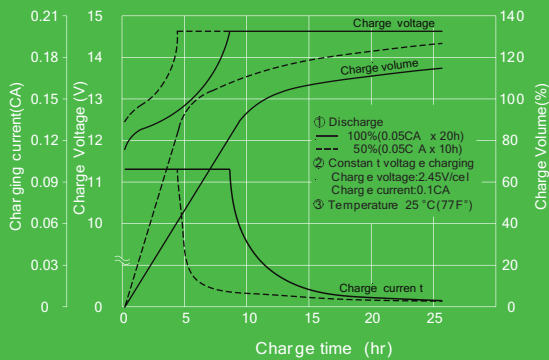

Charging voltage and temperature

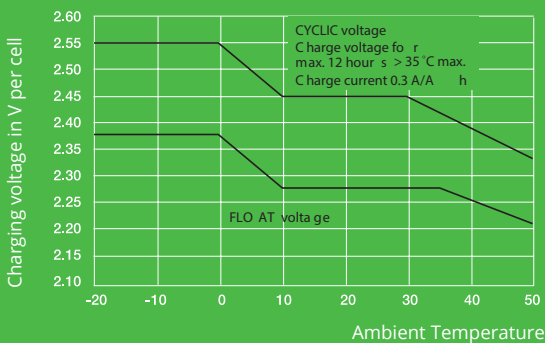

Models available

Model pbq	Capacity in Ah	Dimensions (±2mm) (LxWxH1/H2)	Weight
pbq L 7-12	7	151x65x100mm	2.5 kg
pbq L 9-12	9	151x65x102mm	2.7 kg
pbq L 12-12	12	151x98x101mm	3.7 kg
pbq L 17-12	17	181x77x167mm	5.5 kg
pbq L 28-12	28	168x178x124mm	8.4 kg
pbq L 33-12	33	195x130x160mm	10.7 kg
pbq L 40-12	40	198x167x157mm	13.8 kg
pbq L 55-12	55	229x138x213mm	17.3 kg
pbq L 65-12	65	350x167x179mm	23.4 kg
pbq L 80-12	80	350x167x179mm	22.5 kg
pbq L 100-12	100	330x171x220mm	32 kg
pbq L 120-12	120	410x176x227mm	38 kg
pbq L 150-12	150	482x170x240mm	47 kg
pbq L 200-12	200	522x238x223mm	65 kg
pbq L 230-12	230	520x269x208mm	72.6 kg



Certificates

V-O

Flame retardant casing

Features

- Absorbent Glassmat Technology
- Low self discharge
- Classified as non-spillable and Non Dangerous goods by IATA, FAA, ADR, IMDG
- Can be discharged or stored in any position without leakage
- Cannot be charged while the terminal is downward.